




Classic Closed Frame Touch Monitor

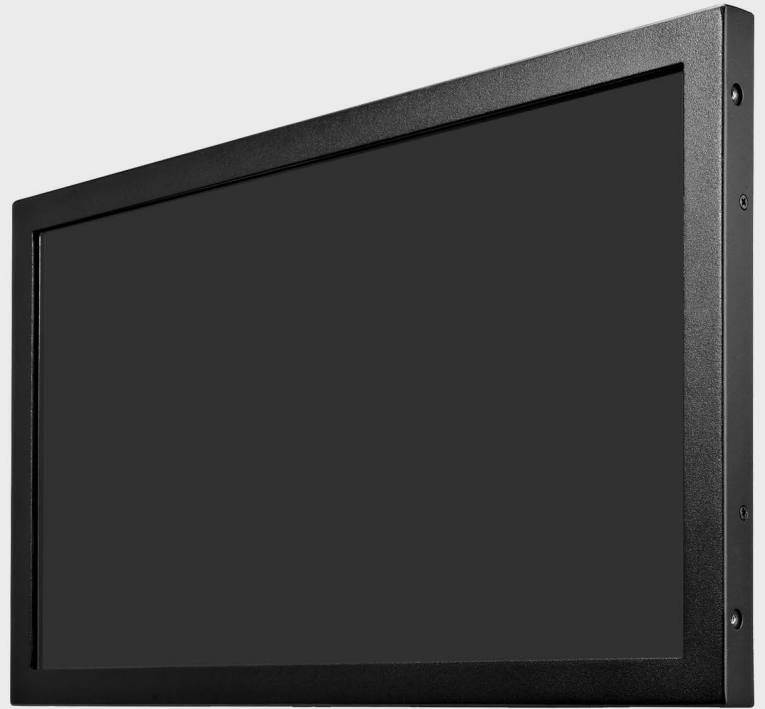

Product Features

- . Water Resistant Front Bezel
- . Choice of Touch Technologies
- . Multiple mounting options
- . Agency approvals CE, FCC, ROHS CB certified.

Specification		8-27 Inch Model
Series		Open Frame, dust proof, waterproof for 1.4mm/1.8mm/2mm/2.4mm/4mm/6mm touch screen
LCD Type		Active Matrix TFT-LCD with LED Backlight
Supported Colours		16.7 Million
Contrast Ratio		1000:1
Brightness(Typ)	Pure LCD Panel	250 cd/m ²
	With PCAP Touchscreen	225 cd/m ²
Brightness from 300-1000cd/m ² can be customised		
Viewing Angle (Typ at CR>10)	Horizontal (Left/Right)	85° / 85°
	Vertical (Up/Down)	80° /80°
Video Input		VGA and DVI or VGA and DVI andHDMI
Frequency		30-80 KHz /60-75 Hz
Power Supply		Type: Power Brick Input Voltage: 100-240 VAC 50-60 Hz
Environment	Operating Temp	0-50°C
	Storage Temp	-20-60°C
	Operating RH	20%-80%
	Storage RH	10%-90%
MTBF		30.000 hours
Backlight Life (Typ)		30.000 hours
Mount Interface		1) VESA 75 mm and 100 mm 2) Mount bracket, horizontal or vertical (standard mount brackets supplied)
OSD Control	Buttons	AUTO, +, POWER,-, MENU
	Function	Brightness, Contrast, Auto adjust, Phase, Clock, H/V Location, Languages, Function, Reset.
Touch System Interface		USB and RS232
Touch Response Time		10Ms
Agency Approval		CE, FCC, ETL, CB, RoHS ,CCC
Warranty		3 years